

**Serie | 2, free-standing fridge-freezer
with freezer at bottom, 186 x 60 cm,
Inox-look
KGN36NL30U**



**The bottom freezer with electronic
temperature control and MultiBox: set the
temperature easily and precisely.**

- **MultiBox:** ideal for the storage of fruit & vegetables.
- **Perfect Fit:** The appliance can be positioned right next to side walls and furniture - flexible installation possible
- **LED interior light:** Illuminates the refrigerator evenly and glare-free, and lasts for its entire life.

Technical Data

Built-in / Free-standing :	Free-standing
Number of compressors :	1
Number of independent cooling systems :	1
Width of the appliance :	600
Depth of the product :	660
Net weight (kg) :	62.346
Door panel options :	Not possible
Door hinge :	Right reversible
Number of Adjustable Shelves in fridge compartment :	3
Shelves for Bottles :	No
Frost free system :	Fridge and freezer
Interior ventilator :	No
Reversible Door Hinge :	Yes
Length electrical supply cord (cm) :	240
Noise level (dB) :	42
Multi-Flow Air Tower :	Yes
Fast cooling switch :	No
Fast freezing switch :	No
Temperature Controlled Drawer :	No
Humidity Control Drawer :	No
Number of Door Bins - Refrigerator :	4
Door bin adjustability - Refrigerator :	No
Tilt-out door bins in fridge :	No
Gallon wide door bins :	Yes
Number of Gallon storage :	1
Motorized Shelf :	No
Door opened indicator freezer :	Yes
Automatic motor-driven ice-maker :	No
Connection Rating (W) :	100
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50
Storage Period in Event of Power Failure (h) :	19
Approval certificates :	CE, VDE
Main colour of product :	Inox-look
Door panel options :	Not possible
Noise level (dB) :	42
Energy Star Qualified :	No
Approval certificates :	CE, VDE
Plug type :	Gardy plug w/ earthing
Required cutout/niche size for installation (in) :	x x
Dimensions of the packed product (in) :	75.39 x 25.98 x 29.92
Net weight (lbs) :	137.000
Gross weight (lbs) :	150.000



Serie | 2, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Inox-look KGN36NL30U

Installation

General Information

The bottom freezer with electronic temperature control and MultiBox: set the temperature easily and precisely.

Performance and consumption

Design and Styling

- Doors Stainless steel look, side panels Pearl grey (VZF 07127)
- Integrated horizontal handle
- LED with Soft Start in fridge section

Convenience & Safety

- NoFrost - never again defrosting!
- LED electronic control
- Super Freezing: manual activation

Fridge Compartment

- Multi Airflow-System
- 4 safety glass shelves of which 3 are height adjustable
- 4 door bins

Freshness System Freshness System

- 1 MultiBox - Transparent drawer with a corrugated bottom, ideal for storing fruits and vegetables.

Freezer Section

- 3 transparent freezer drawers

Dimensions

- Appliance Dimensions (H x W x D): 186.0 cm x Appliance width: 60 cm x 66.0 cm

Technical Information

- Door right hinged, reversible
- Height adjustable front feet
- Connected load: 100 W
- Nominal voltage: 220 - 240 V

Accessories


Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the attached distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.

Environment and Safety


Serie | 2, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Inox-look KGN36NL30U

Appliance name	a	b	c	d	e	f	g
KGN36 (Inner handle)	1860	600	660	590	600	1210	660
KGN36 (Outer handle)	1860	600	660	590	640	1210	700

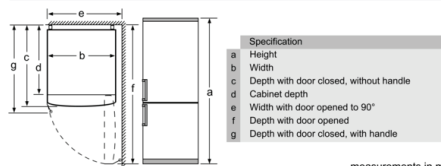


measurements in mm

Appliance name	a	b	c	d	e	f	g	h
KGN36 (Inner handle)	1860	600	660	590	600	1210	660	12
KGN36 (Outer handle)	1860	600	660	590	640	1210	700	12

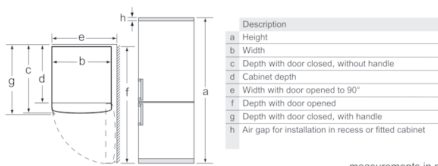

measurements in mm

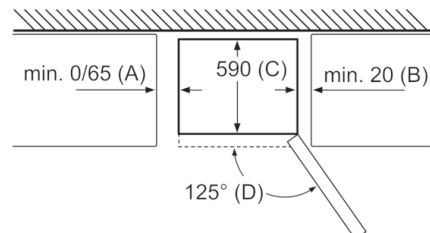

Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

Dimension A:
In models with vertical integrated handles, in order to open easily, a minimum distance of 65 mm is needed.

measurements in mm