


**Series 6, Gas hob, 75 cm, Stainless steel**  
**PCQ7A5M90**

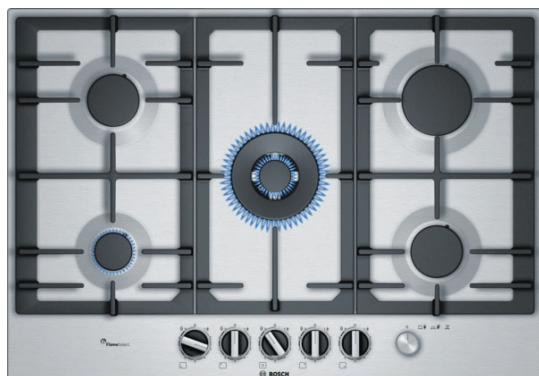

**Optional accessories**

- HEZ211310 : Simmer cap
- HEZ298105 : Simmer plate
- HEZ298107 : Wok ring
- HEZ298115 : Small pot support

**The stainless-steel gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.**

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Main Switch:** turn off all the burners on your hob at the touch of a button.
- **Wok burner:** powerful cooking at up to 4 kW (depending on gas type).
- **Continuous cast-iron pan support:** for high firmness and stability of cookware.
- **Biomethane Ready:** your gas hob can also be powered with eco-friendly biomethane gas.

**Technical Data**

Product name/family : gas hob w integrated controls  
 Built-in / Free-standing : Built-in  
 Energy input : Gas  
 Total number of positions that can be used at the same time : 5  
 Type of control setting devices : sword knobs  
 Min. required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm  
 Width of the appliance : 750 mm  
 Dimensions : 53 x 750 x 520 mm  
 Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm  
 Net weight : 14.0 kg  
 Gross weight : 15.5 kg  
 Residual heat indicator : Without  
 Location of control panel : Front  
 Basic surface material : Stainless steel  
 Color of surface : Stainless steel  
 Length electrical supply cord : 100.0 cm  
 Knob Material : Plastic  
 Sealed Burners : No  
 Type of pan support : Elongated cast iron pan support  
 Power of heating element (kW) : 1 kW  
 Power of 3rd heating element (kW) : 1.75 kW  
 Power of 5th heating element (kW) : 3 kW  
 Connection Rating : 1 W  
 Gas connection rating : 11500 W  
 Fuse protection : 3 A  
 Voltage : 220-240 V  
 Frequency : 50; 60 Hz  
 Energy input : Gas  
 Gas type : Nat gas H/E/(L) 20 (25) mbar  
 Alternative gas type : Liquid gas G30,31 28-30/37mbar  
 Plug type : No plug (electrical connection by electrician)  
 Appliance Dimensions (h x w x d) (in) : x x  
 Dimensions of the packed product : 5.70 x 23.50 x 31.22  
 Net weight : 31.000 lbs  
 Gross weight : 34.000 lbs  
 Total number of positions that can be used at the same time : 5  
 Length electrical supply cord : 100.0 cm  
 Min. required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm  
 Dimensions : 53 x 750 x 520 mm  
 Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm  
 Net weight : 14.0 kg  
 Gross weight : 15.5 kg



## Series 6, Gas hob, 75 cm, Stainless steel PCQ7A5M90

### The stainless-steel gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.

customer service. For nozzle change, please contact the customer service.

- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 11.5 KW

#### Design

- Stainless steel surface
- Cast iron continuous pan supports

#### Usage convenience

- FlameSelect: precisely adjust the flame in nine defined and repeatable levels.
- Sword control knobs: easily access knobs in front with strong grip for effortless turning.
- 1 Hand ignition: just push and turn the knob to ignite the flame.

#### Burners and power

- 5 Gas burners
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 4 KW (depending on gas type)
- Right rear: Rapid burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

#### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- Main switch: switch off all burners in one go with just one button.

#### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)  
NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU)  
Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar  
Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Preset for natural gas (20mbar)
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included.  
Nozzles for all other gas types can be ordered via the

**Series 6, Gas hob, 75 cm, Stainless steel  
PCQ7A5M90**

