


**Series 6, Gas hob, 90 cm, Tempered glass, Black
PPM9A6I40**

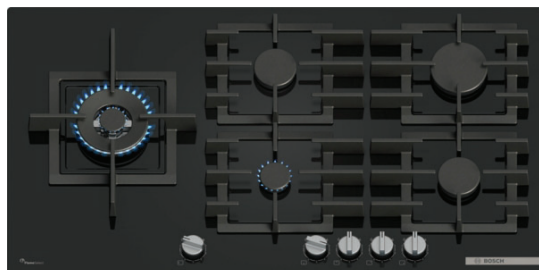

Optional accessories

HEZ298105 : Simmer plate
HEZ298107 : Wok ring
HEZ298114 : Small pot support
HEZ32WA00 : Wireless food thermometer
HEZ9SE040 : 4 pieces Set
HEZ9SE060 : 6 pieces Set

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Easy cleaning:** detachable knobs and dishwasher-suitable pan supports make cleaning a breeze.
- **Dishwasher-suitable pan supports:** make cleaning your hob even easier.
- **Semi-continuous pan supports:** smaller for easy cleaning, yet providing a seamless cooking surface.
- **Safety gas cut-off:** ensures safety by instantly cutting off gas supply if the flame goes out.

Technical Data

Product name/family : gas hob w integrated controls
Built-in / Free-standing : Built-in
Energy input : Gas
Total number of positions that can be used at the same time : 5
Required niche size for installation (HxWxD) : 45 x 850-850 x 490-500 mm
Width of the appliance : 915 mm
Dimensions : 45x915x520 mm
Dimensions of the packed product (HxWxD) : 170x1120x660 mm
Net weight : 22.9 kg
Gross weight : 26.3 kg
Residual heat indicator : Without
Location of control panel : Front
Basic surface material : Tempered glass
Color of surface : Black
Color of frame : Black
Length electrical supply cord : 100 cm
Knob Material : Full metal
Sealed Burners : No
Power of 2nd heating element (kW) : 4000 W
Power of 4th heating element (kW) : 1750.00 W
Power of 5th heating element (kW) : 3000 W
Connection Rating : 1 W
Gas connection rating : 11500 W
Fuse protection : 3 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Energy input : Gas
Gas type preset : Nat gas H/E/(L) 20 (25) mbar
Certified gas types : Liquid gas G30,31 28-30/37mbar
Plug type : No plug (electrical connection by electrician)
Appliance Dimensions (h x w x d) (in) : x x
Dimensions of the packed product : 6.69 x 25.98 x 44.09
Net weight : 51.000 lbs
Gross weight : 58.000 lbs



4 242005 496242

Series 6, Gas hob, 90 cm, Tempered glass, Black PPM9A6I40

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

Design

- Tempered glass hob surface, black
- Two built-in options: install the hob either flush or slightly raised on the worktop
- Semi-continuous cast iron pan supports
- Metal knobs

Usage convenience

- FlameSelect: precisely adjust the flame in nine defined and repeatable levels.
- Sword knobs, front: easily access knobs in front with strong grip for effortless turning.
- Automatic ignition: just push and turn the knob to ignite the flame.

Burners and power

- 5 Gas burners
- Left: Wok burner up to 4 KW (depending on gas type)
- Center front: Economy burner up to 1 KW (depending on gas type)
- Center rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: Rapid burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Cleaning

- Removable knobs for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.
- Semi-continuous cast iron pan supports: little weight and compact form, yet high stability due to continuous surface.

Safety

- Safety gas cut-off: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Preset for natural gas (20mbar)
- Nozzle set for Preset for natural gas (20mbar). Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 500)
- Required niche size for flush installation (HxWxD mm): 45 x 919 x 524
- Min. worktop thickness: 20 mm
- For raised installation, it is possible to install in worktops that are between 12 mm and 20 mm by using a spacer, which is available from technical customer service.
- If installed flush, minimum worktop thickness is 30 mm.
- Power cord: 1 m
- Connected load: 11.5 KW

**Series 6, Gas hob, 90 cm, Tempered glass,
Black
PPM9A6I40**

